


RBC's New **DuraLube**[™] **II**Maintenance Free Spherical Plain Bearings

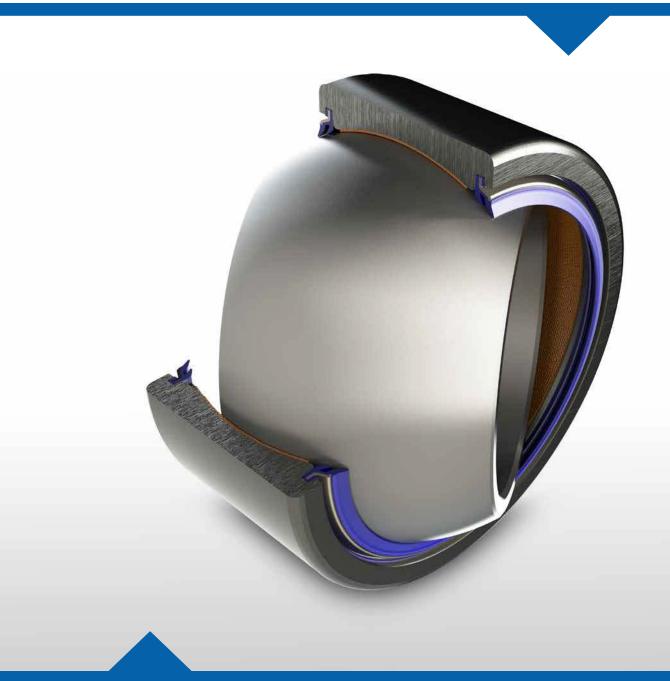

RBC: Your Maintenance Free Solution Provider

RBC's New **DuraLube**™ **II**Maintenance Free Spherical Plain Bearings

RBC's DuraLube[™] II maintenance free spherical plain bearings provide reliable, grease-free operation through the use of highly-engineered PTFE liner systems that reduce friction between the surfaces of the inner and outer rings. These proprietary liner systems are developed for rigorous industrial applications, and have proven successful time and time again. Coupled with the most advanced sealing system on the market, the RBC solution provides the maximum durability you need in the most demanding applications.

Features

- ✓ Most Advanced Liner Technologies
- ✓ High Performance Sealing System
- √ Higher Load Ratings vs Steel-on-Steel
- ✓ Proven in the Most Demanding Conditions

Benefits

- ✓ No Costly Lubrication Systems
- ✓ Reduced Operating Costs
- Environmentally Friendly
- Ensures Lubricant is in the Load Zone



RBC's New **DuraLube**™ **II**Maintenance Free Spherical Plain Bearings



RBC TriLock™ Sealing Designs

- ✓ The most robust sealing option on the market
- √ Triple barrier protection
- ✓ Protection vs hard contaminants as well as dust/water ingress
- Optimized design to keep PTFE material in the bearing

PTFE Liner Options

Liner System	Load Rating	Reverse Loading	Low Friction	Operating Velocity	Wear Resistance
DuraLube [™] II Standard	\checkmark	$\checkmark\checkmark$	$\checkmark\checkmark$	$\checkmark\checkmark$	\checkmark
DuraLube [™] II Plus	/ /	√	///	///	√ √
DuraLube [™] II Ultra	///	$\checkmark\checkmark\checkmark$	✓	✓	$\checkmark\checkmark\checkmark$

Part Numbering System

B = Inch Series Spherical Plain BearingGE = Metric Series Spherical Plain Bearing

DLS = DuraLube[™] II Standard

DLP = DuraLube[™] II Plus

DLU = DuraLube[™] II Ultra



= Bore Size*

L = Single Fracture**

TS = TriLock[™] Seal

9L = Double Fracture

SS = Scraper Seal

For specific technical details or custom designed solutions, please consult with RBC Sales or Application Engineering Representative, or visit www.rbcbearings.com/DuraLube.

^{*} Bore size (in the metric series # in millimeters, in the inch series # is 1/16 inch)

^{**} L is dropped on single fractured metric bearings



Innovation. Commitment. Quality.

RBC has been producing bearings in the USA since 1919. In addition to unique custom bearings, RBC offers a full line of standard industrial and aerospace bearings, including:



Tapered Roller Thrust Bearings

Case-hardened tapered roller thrust bearings for oilfield top drives and swivels. Available in full complement, maximum capacity versions.



Thin Section Ball Bearings

Standard cross sections to one inch. Bore sizes to 40 inches. Stainless steel and other materials are available. Seals are available on all sizes and standard cross sections. Super duplex configurations.



Cam Followers

Standard stud, heavy stud, yoke type, caged roller followers. Patented RBC Roller® cylindrical roller cam followers, HexLube® universal cam followers, airframe track rollers.



Cylindrical Roller Bearings

Cylindrical roller bearings designed for mud pump pinion and eccentric positions. Fully interchangeable to industry standards.



Needle Roller Bearings

Pitchlign® caged heavy duty needle roller bearings ideal for cross head bearings applications. These double row bearings are available in single row and Tandem Roller® versions.



Commercial Rod Ends

Commercial and industrial, precision, Mil-Spec series, selflubricating, and aircraft. Sold under the Heim®, Unibal®, and Spherco® names. Available in inch and metric sizes.



Spherical Plain **Bearings**

Radial, angular contact, extended inner ring, high misalignment. QuadLube®, ImpactTuff®, SpreadLock® Seal, CrossLube®, DuraLube™, and self-lubricating bearings. Available in inch and metric sizes.



Tapered Roller Bearings

Single, double, & multi row versions available for main bearing positions in mud pumps, gear boxes, etc. Bearings are constructed of case hardened steel washers and rollers with bore size of 11" or greater.



TP Series Bearings

RBC's TP Series cylindrical roller thrust bearings ideal for crane hooks, oil well swivels, winch systems, and gear boxes. Fully interchangeable with industry standard offering.



Keyless Locking Devices

Mechanical bushings used to connect power transmission components onto rotating shafts. Without the use of keyways, KLDs eliminate the problems associated with backlash including fretting, corroding, and wallowing.



Lubron[™] Bearings

designed and custom manufactured in most any size, material and bearing configuration. Applications include hydro power and water control, nuclear power generation, infrastructure, architecture, offshore marine, industrial, machinery and heavy equipment.



Shaft Collars

Used to position or locate a component on a shaft. Made from mild steel, type 303 or 316 stainless steel, aluminum, or acetal. Available in inch and metric sizes.



Self-Lubricating Bearings

Radial, thrust, rod ends, spherical bearings, high temperature, high loads. Available in inch and metric sizes. Fiberglide® self-lubricating bearings.



Lubron[™]self-lubricating bearings



Specials

RBC manufactures many specialty bearings for the aerospace, oil and energy, semiconductor equipment, packaging, transportation, and other industries.



Rigid Couplings

Shaft couplings serve as components to time, join, or align shafts at lower speeds and torque, especially when zero backlash is desired. Made from mild steel with a black oxide finish type 303 stainless steel, or aluminum. Available in inch and metric sizes.



PIC Design®

Complete line of precision gears, precision hardware, timing belts, pulleys, and linear motion systems. Industries served include industrial, aerospace, defense, medical, robotics and automation. material handling, and assembly. Custom design support for unique applications.



Ball Bearings

Precision ground, semiground, unground. High loads, long life, smooth operation. Nice® branded products are offered in caged and full complement configurations.















www.rbcbearings.com

800.390.3300

This document contains a general overview of the products and features described herein. It is solely for informational purposes, does not represent a warranty of the information contained herein, and is not to be construed as an offer to sell or a solicitation to buy. Contact RBC Bearings for detailed information suitable to your specific applications. RBC Bearings reserves the right to modify its products and related product information at any time without prior notice. Some of the products listed herein may be covered by one or more issued and pending U.S. or foreign patents. Contact RBC Bearings for product specific information.